
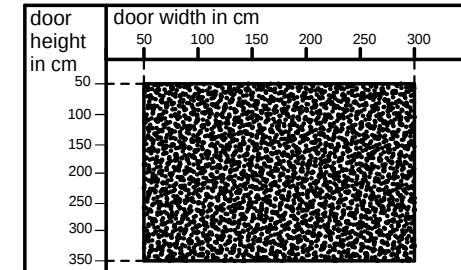
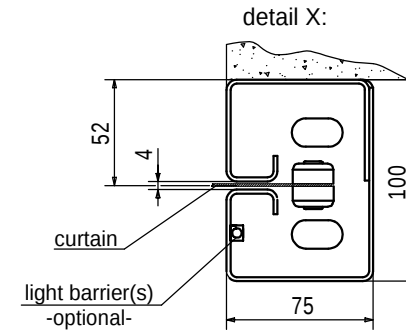
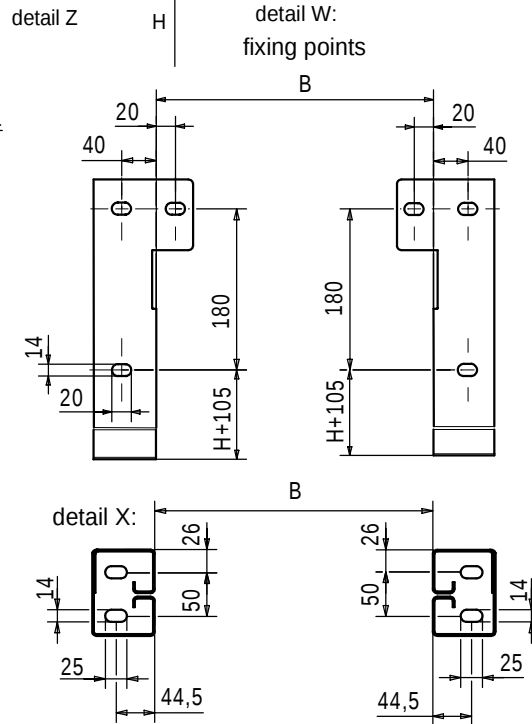
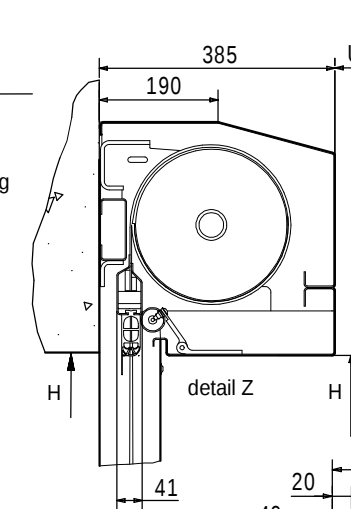
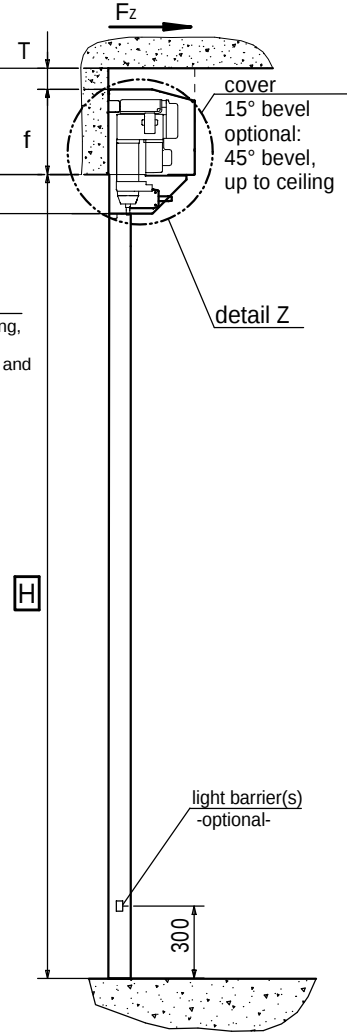
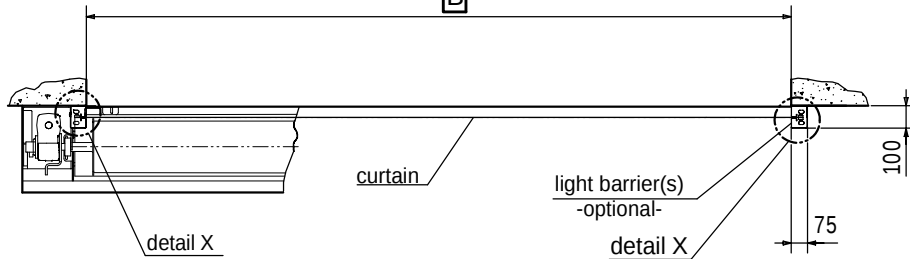


standard control box mounted on wall (motorside)

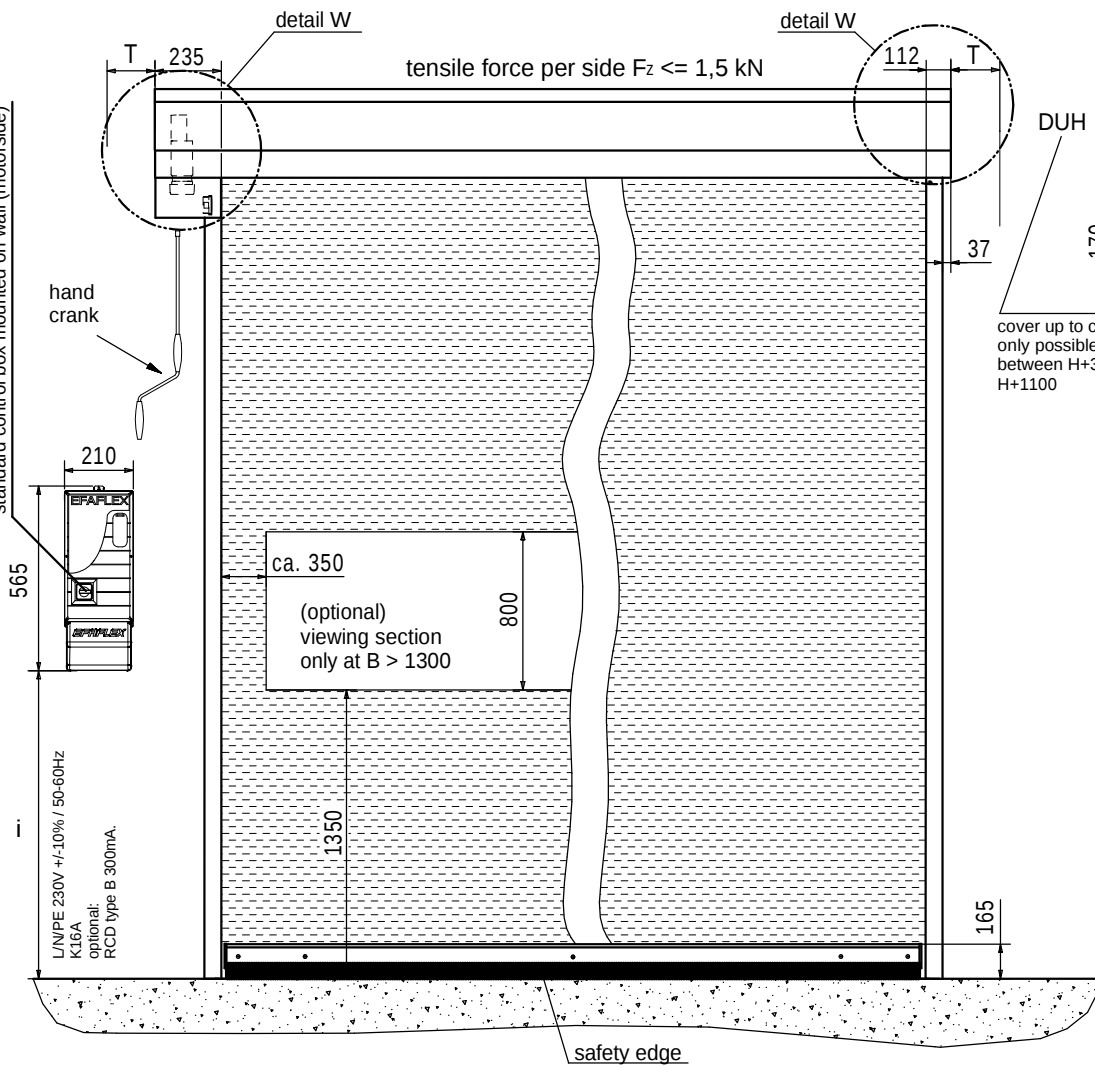

dim.	mm	remarks
f	380	15° bevel
f	620	45° bevel
f+T	DUH	370 <= DUH <= 1100
i	ca.1000	control box height
T	ca. 50	Installation clearance
U	400	Installation clearance

B=clear width
H=clear height
DUH=ceiling over H; with cover up to ceiling
Unless otherwise stated, all dimensions in mm.

detail W:
fixing points

B

H+105

B

detail X:

26

50

14

25

44,5

26

50

14

25

44,5

door height in cm

door width in cm

50

100

150

200

250

300

350

100

150

200

250

300

350

Type: EFA-SRT® CR Efficient

Drw.No.: 678A03

Substitutes : 678A02

High-speed roll-up door
"CLEAN ROOM" EFFICIENT

EFAFLEX
schnelle und sichere Tore

EFAFLEX Tor- und Sicherheitssysteme
GmbH & Co.KG
Fliederstraße 14
D-84079 Bruckberg

	Date	Name
Draw.	27.11.15	Sentjunc
Appr.		

The reproduction, distribution and utilization of this drawing as well as the communication of its contents to third parties without explicit authorisation is prohibited.
This drawing is protected by copyright.
ISO 16016

Le dessin reste notre propriété.
Il n'est pas permis de le multiplier sans notre consentement, ni de soumettre aux autres personnes ni d'abandonner à la concurrence pour quelques intentions. Ce dessin est protégé par le droit d'auteur. ISO 16016

Weitergabe, Vervielfältigung sowie Verwertung des Inhalts dieser Zeichnung sind verboten, soweit nicht ausdrücklich vereinbart. Diese Zeichnung ist urheberrechtlich geschützt.
ISO 16016